


::requires oorexxunit.cls

Object		
new	Assert	TestResult
= \= == \== <> >>	assertCount	addError
	assertEquals	addFailure
" " (abuttal)	assertFalse	assertCount
" " (blank)	assertNotEquals	endTest
class	assertNotNull	errorCount
copy	assertNotSame	errors
defaultName	assertNull	failureCount
hashCode	assertSame	failures
hasMethod	assertTrue	init
identityHash	check4conditionFailure	logQueue[=]
init	checkCondition	run
instanceMethod	clearCondition	runCount
instanceMethods	conditionExpected[=]	shouldStop
isA, isInstanceOf	expectCondition	startTest
objectName[=]	expectSyntax	stop
request	fail	testCaseTable[=]
run	fAssertions[=]	wasSuccessful
setMethod	init	
start		
string		
unsetMethod		
	TestCase	
	defaultTestResultClass[=]	
	init	
	testCaseInfo[=]	
	countTestCases[=]	
	createResult	
	getName	
	init	
	run	
	setName	
	setup	
	string	
	tearDown	
	testCaseInfo[=]	
	TestSuite	
	getTestMethods	
	addTest	
	countTestCases	
	init	
	run	

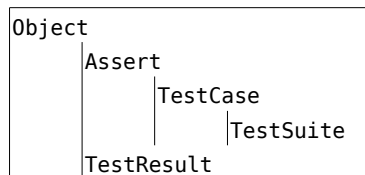

Class Name (Alphabetically Sorted)	Immediate Superclass
Assert	Object
Object	n/a
TestCase	Assert
TestResult	Object
TestSuite	TestCase

Note: Bold methods denote class methods and are listed first (**defaultTestResultClass[=]**, **getTestMethods**, **init**, **testCaseInfo[=]**)

(2007-10-31 17:00:51)

Red: 3.1.2

Green: 3.2.0

Rony G. Flatscher