


::requires oorexxunit.cls

Object		
new	Assert	TestResult
= \= == \== <> ><	assertCount	addError
class	assertEquals	addFailure
copy	assertFalse	assertCount
defaultName	assertNotEquals	endTest
hasMethod	assertNotNull	errorCount
init	assertNotSame	errors
instanceMethod	assertNull	failureCount
instanceMethods	assertSame	failures
isA, isInstanceOf	assertTrue	init
objectName[=]	check4conditionFailure	logQueue[=]
request	checkCondition	run
run	clearCondition	runCount
setMethod	conditionExpected[=]	shouldStop
start	expectCondition	startTest
startAt	expectSyntax	stop
string	fail	testCaseTable[=]
unsetMethod	fAssertions[=]	wasSuccessful
	init	
	TestCase	
	defaultTestResultClass[=]	
	init	
	testCaseInfo[=]	
	countTestCases[=]	
	createResult	
	getName	
	init	
	run	
	setName	
	setup	
	string	
	tearDown	
	testCaseInfo[=]	
	TestSuite	
	getTestMethods	
	addTest	
	countTestCases	
	init	
	run	

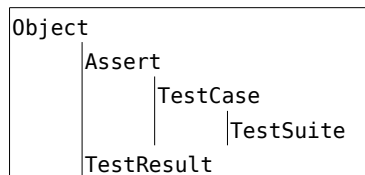

Class Name (Alphabetically Sorted)	Immediate Superclass
Assert	Object
Object	n/a
TestCase	Assert
TestResult	Object
TestSuite	TestCase

Note: Bold methods denote class methods and are listed first (**defaultTestResultClass[=]**, **getTestMethods**, **init**, **testCaseInfo[=]**)

Red: 3.1.2

Green: planned for 3.2

(2007-06-07 22:36:09)

Rony G. Flatscher